



ELECTRONICS, INC.
44 FARRAND STREET
BLOOMFIELD, NJ 07003
(973) 748-5089
<http://www.nteinc.com>

NTE2598
Silicon NPN Transistor
High Voltage, High Current Switch
TO3PBL Type Package

Features:

- High Breakdown Voltage, Reliability
- fast Switching Speed
- Wide ASO

Absolute Maximum Ratings: ($T_A = +25^\circ\text{C}$ unless otherwise specified)

Collector–Base Voltage, V_{CBO}	1100V
Collector–Emitter Voltage, V_{CEO}	800V
Emitter–Base Voltage, V_{EBO}	7V
Collector Current, I_C	
Continuous	25A
Peak (Note 1)	60A
Base Current, I_B	12A
Collector Power Dissipation ($T_C = +25^\circ\text{C}$), P_C	300W
Operating Junction Temperature, T_J	+150°C
Storage Temperature Range, T_{stg}	-55° to +150°C


Note 1. Pulse Test: Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 10\%$.

Electrical Characteristics: ($T_A = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector Cutoff Current	I_{CBO}	$V_{CB} = 800\text{V}$, $I_E = 0$	-	-	10	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = 5\text{V}$, $I_C = 0$	-	-	10	μA
DC Current Gain	h_{FE}	$V_{CE} = 5\text{V}$, $I_C = 1.6\text{A}$	15	-	40	
		$V_{CE} = 5\text{V}$, $I_C = 8\text{A}$	8	-	-	
Gain–Bandwidth Product	f_T	$V_{CE} = 10\text{V}$, $I_C = 1.6\text{A}$	-	15	-	MHz
Output Capacitance	C_{ob}	$V_{CB} = 10\text{V}$, $f = 1\text{MHz}$	-	470	-	pF
Collector–Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 12\text{A}$, $I_B = 2.4\text{A}$	-	-	2.0	V
Base–Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = 12\text{A}$, $I_B = 2.4\text{A}$	-	-	1.5	V

Electrical Characteristics (Cont'd): ($T_A = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector–Base Breakdown Voltage	$V_{(\text{BR})\text{CBO}}$	$I_C = 1\text{mA}, I_E = 0$	1100	—	—	V
Collector–Emitter Breakdown Voltage	$V_{(\text{BR})\text{CEO}}$	$I_C = 10\text{A}, R_{BE} = \infty$	800	—	—	V
Emitter–Base Breakdown Voltage	$V_{(\text{BR})\text{EBO}}$	$I_E = 1\text{mA}, I_C = 0$	7	—	—	V
Collector–Emitter Sustaining Voltage	$V_{\text{CEO}(\text{sus})}$	$I_C = 12\text{A}, I_{B1} = -I_{B2} = 2.4\text{A}, I = 50\mu\text{H}, \text{Clamped}$	800	—	—	V
Turn–On Time	t_{on}	$V_{CC} = 400\text{V}, 5I_{B1} = -2.5I_{B2} = I_C = 20\text{A}, R_L = 20\Omega$	—	—	0.5	μs
Storage Time	t_{stg}		—	—	3.0	μs
Fall Time	t_f		—	—	0.3	μs

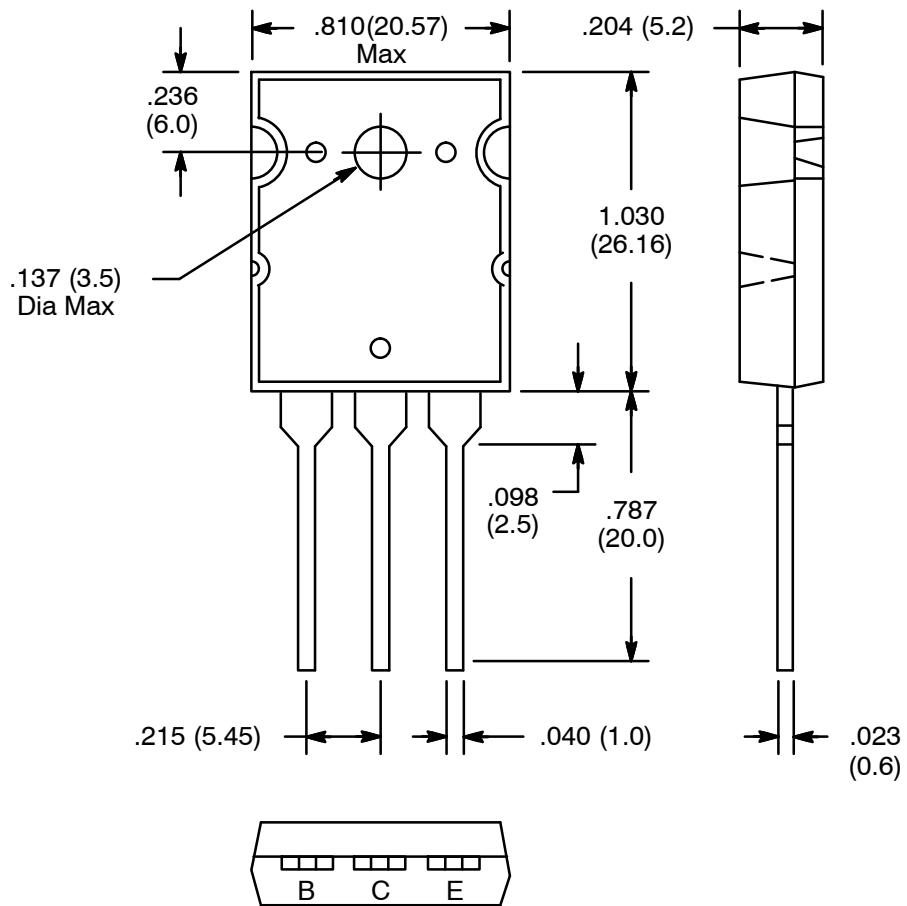

Note: Collector connected to heat sink.